

⑩ 日本国特許庁(JP)

⑪ 特許出願公開

⑫ 公開特許公報(A)

平2-22958

⑬ Int. Cl.

識別記号

庁内整理番号

⑭ 公開 平成2年(1990)1月25日

H 04 N 1/04  
G 06 F 15/64  
G 06 K 9/20  
H 04 N 1/12

3 2 0 A  
3 1 0 B  
Z

7037-5C  
8419-5B  
6942-5B  
7037-5C

審査請求 未請求 請求項の数 2 (全4頁)

⑮ 発明の名称 画像読み取り装置

⑯ 特 願 昭63-173307

⑰ 出 願 昭63(1988)7月12日

⑱ 発 明 者 若 原 廣 大阪府門真市大字門真1006番地 松下電器産業株式会社内  
⑱ 発 明 者 吉 井 誠 児 大阪府門真市大字門真1006番地 松下電器産業株式会社内  
⑱ 発 明 者 吉 田 恒 義 大阪府門真市大字門真1006番地 松下電器産業株式会社内  
⑲ 出 願 人 松下電器産業株式会社 大阪府門真市大字門真1006番地  
⑳ 代 理 人 弁理士 栗野 重孝 外1名

# 明 細 書

## 1. 発明の名称

画像読み取り装置

## 2. 特許請求の範囲

(1) 画像読み取り部と駆動部と走査部が一体的に構成された本体と、前記本体と連結し、前記駆動部により被動される給紙部とを備えたことを特徴とする画像読み取り装置。

(2) 本体のみ使用して走査部で前記本体を移動させて行い第一の画像読み取りモードと、前記本体と前記給紙部を連結して原稿を前記駆動部により搬送させて行い第二の画像読み取りモードとを備えたことを特徴とする特許請求の範囲第1項記載の画像読み取り装置。

## 3. 発明の詳細な説明

産業上の利用分野

本発明は、ワードプロセッサ、パーソナルコンピュータ等で作成する文書などに説明のため挿入する図形、またはOCR等の画像認識のための図形の入力のために使用する画像読み取り装置に関

するものである。

従来の技術

近年、ワードプロセッサ(以下においてワープロと略記する)、パソコン等で作成する文書の説明を分かりやすくするため図形を挿入したいという要望が非常に強まっている。しかしながら、小型で使いやすい読み取り装置は市場に存在しないのが現状である。

以下、従来の手動型およびシートフィーダ型の画像読み取り装置について説明する。

第5図(1)、(2)、(3)は従来の手動型の画像読み取り装置の正面図、上面図、側面図であり、第6図は第5図のA-A'断面図である。

第5図に於いて、1は本体、2はスタートスイッチ、3は接続ケーブル、4はワープロ本体である。

第6図に於いて、5はカバーガラス、6はミラー、7はレンズ、8は1次元読み取りセンサー、9は読み取り(副走査)方向のライン周期に対応して信号を発生するエンコーダー、10は光源、

11はフレーム、12はカバーである。

以上のように構成された従来の画像読み取り装置について、以下その動作を説明する。本体1を取り込みたい原稿の画像の上に置いて、スタートスイッチ2を押すことにより、ワープロ本体4への画像取り込み開始を伝える。続いて手動で本体1を手前に引くことによりエンコーダー9より1ライン毎の周期を発生させ、接続ケーブル8を通して1ライン周期の信号をワープロ本体4へ送る。原稿像を光源10で照明し、カバーガラス5を通し、ミラー6で光路を変えて、レンズ7で集光し、1次元読み取りセンサー8に結像させる。1次元読み取りセンサー8よりエンコーダー9とは非同期に取り込んだ1ライン毎の原稿像の信号を、ワープロ本体4に、接続ケーブル8を通して転送する。ワープロ本体4側では、エンコーダー9の1ライン周期毎の立ち上がりまたは立ち下がりて原稿像の信号を1ライン分毎に取り込む。

第7図(ハ)、(ヘ)は従来のシートフィーダー型の画像読み取り装置の正面図、側面図であり、第8図

ン毎の立ち上がりまたは立ち下がりて原稿像の信号を1ライン分毎に取り込む。

発明が解決しようとする課題

しかしながら、上記の手動型の構成では、固定方向の読み取りは操作する人の熟練度にかかっており常時、確実な読み込みができなかった。

また、上記のシートフィーダー型の構成では、書籍または大きい平面の原稿を読み込ませたくても読み込むことができなかった。

本発明は、上記従来の問題点を解決するもので、シート状原稿の時は、確実な読み込みができるシートフィーダー型として機能し、書籍または大きい平面の原稿を読み込みたい時には、自走型として機能する本体への接続ケーブルが1本の小型化した画像読み取り装置を提供することを目的とする。

課題を解決するための手段

この目的を達成するために、画像読み取り部と駆動部と走査部が一体的に構成された本体と、前記本体と連結し前記駆動部により被動される給紙

はその要部の断面図である。第7図に於いて、13は本体、14はスタートスイッチ、15は接続ケーブル、16はワープロ本体である。

第8図に於いて、17はカバーガラス、18はミラー、19はレンズ、20は1次元読み取りセンサー、21は光源、22は給紙ローラー、23はフレーム、24はカバーである。

以上のように構成された従来の画像読み取り装置について、以下その動作を説明する。本体13の給紙ローラー22とカバーガラス17の間に取り込みたい原稿を挿入して、スタートスイッチ14を押すことにより、ワープロ本体16への画像取り込み開始を伝える。続いて給紙ローラー22で原稿を搬送する。原稿像を光源21で照明し、カバーガラス17を通し、ミラー18で光路を変えて、レンズ19で集光し、1次元読み取りセンサー20に結像する。給紙ローラー22に同期して取り込んだ1ライン毎の原稿像の信号を、ワープロ本体16に、接続ケーブル15を通して転送する。ワープロ本体16側では、同期信号の1ライ

部とを備えた構成を有している。

作用

この構成によって、シート状原稿の時は、確実な読み込みができるシートフィーダー型として画像を読み込み、書籍または大きい平面の原稿を読み込みたい時には、自走型として画像を読み込む事ができるため非常に使い勝手が良い。そして、本体への接続ケーブルが1本のため操作性が非常に良い。

実施例

以下本発明の一実施例について、図面を参照しながら説明する。

第1図(ハ)、(ヘ)は、本発明の第1の実施例に於ける画像読み取り装置の正面図、側面図であり、第2図は第1図のB-B'断面図であり、第3図は第1図のC-C'断面図であり、第4図は第1図のD-D'断面図である。

第1図に於いて、25は本体、26はスタートスイッチ、27は給紙部、28は接続ケーブル、29はワープロ本体である。

第2図に於いて、30はカバーガラス、31はミラー、32はレンズ、33は1次元読み取りセンサー、34は光源、35はフレーム、36はカバーである。

第3図に於て37はモーター、38は本体側ギヤトレイン、39は給紙部側ギヤトレイン、40は給紙ローラーであり、モーター37と本体側ギヤトレイン38で駆動部を形成し、給紙部側ギヤトレイン39と給紙ローラー40で給紙部を形成する。

第4図に於いて、41は走査ローラーで、本体側ギヤトレイン38に連結し、走査部を形成する。

以上のように構成された画像読み取り装置について、以下その動作を説明する。

まず、自走型として使用する場合は、本体25を取り込みたい原稿の画像の上に置いて、スタートスイッチ26を押すことにより、ワープロ本体29への画像取り込み開始を伝える。続いてモーター37により、本体側ギヤトレイン38そして走査ローラー41を回転させて、原稿上の本体

25を移動させる。原稿像を光源34で照明し、カバーガラス30を通し、ミラー31で光路を変えて、レンズ32で集光し、1次元読み取りセンサー33に結像させる。1次元読み取りセンサー33より取り込んだ1ライン毎の原稿像の信号をワープロ本体29に、接続ケーブル28を通して転送する。ワープロ本体29側では、モーター同期信号の1ライン毎の立ち上がりまたは立ち下がりて原稿像の信号を1ライン分毎に取り込む。

また、第2の実施例としては、第1の実施例でシートフィーダー型として使用する時に、1ラインの同期信号としてモーターの同期信号を用いた代わりに、エンコーダー信号を用い、モーターまたは本体側ギヤトレインにエンコーダーを連結してエンコーダーの1ライン毎の立ち上がりまたは立ち下がりて原稿像の信号を1ライン分毎に取り込むものである。

なお、簡略化のためミラーを2枚しか用いていないが、多数枚用いることによりさらに本体のコンパクト化が計れることは言うまでもない。

また、光源の関係で電圧容量が足りないときは、ワープロ本体側のコネクタ近傍でDCケーブルを

28を移動させる。原稿像を光源34で照明し、カバーガラス30を通し、ミラー31で光路を変えて、レンズ32で集光し、1次元読み取りセンサー33に結像させる。1次元読み取りセンサー33よりモーター37と同期して1ライン毎に取り込んだ原稿像の信号を、ワープロ本体29に接続ケーブル28を通して転送する。ワープロ本体29側では、モーター37の同期信号の1ライン毎の立ち上がりまたは立ち下がりて原稿像の信号を1ライン分毎に取り込む。

また、シートフィーダー型として使用する場合は、本体25の給紙ローラー40とカバーガラス30の間に取り込みたい原稿を挿入して、スタートスイッチ26を押すことにより、ワープロ本体29への画像取り込み開始を伝える。続いて本体25内部のモーター37から動力を本体側ギヤトレイン38と噛み合わせた給紙部側ギヤトレイン39に伝えることにより、給紙ローラー40を回転させて原稿を搬送する。原稿像を光源34で照明し、カバーガラス30を通し、ミラー31で光路を変

連結すれば、操作性は損なわれず、概略体のケーブルとして扱えることは言うまでもない。

さらに、説明をしやすいように、メインの機器をワープロとしたが、これはパソコンでもいいことは言うまでもない。

#### 発明の効果

上記実施例より明らかなように本発明によれば、従来の手動型、シートフィーダー型の長所を巧みに取り入れた画像読み取り装置を実現することができ、操作性をも非常に向上させることができる。


#### 4. 図面の簡単な説明

第1図は本発明の第1の実施例に於ける画像読み取り装置の構成図、第2図～第4図はそれぞれ同要部の断面図、第5図は従来の画像読み取り装置の構成図、第6図は同要部の断面図、第7図は他の従来例の構成図、第8図は同要部の断面図である。

25……本体、27……給紙部、29……ワープロ本体、37……モーター、40……給紙ローラー。

25---本体  
26---スタートスイッチ  
27---始試部  
28---接続ケーブル  
29---ワープロ本体

第 1 図

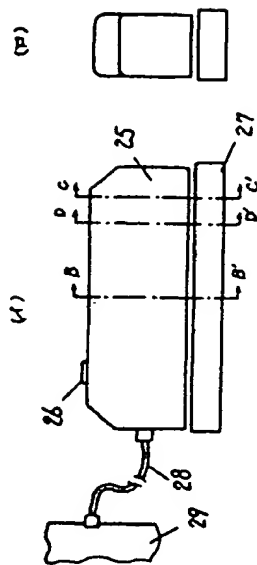


第 2 図



30-ガラス  
31-ミラー  
32-レンズ  
33-光源  
34-光源  
35-フレア  
36-カバ  
40-回転ロー  
41-変位ロー

第 3 図


37-モーター  
38-本体側ハイトレ  
39-前風部側ハイトレ




第 4 図

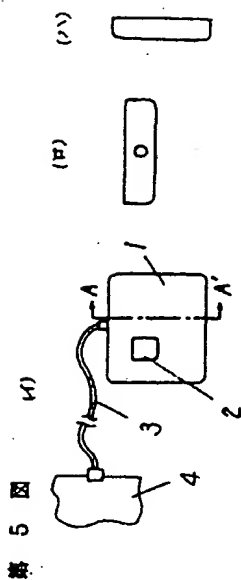


第 5 図

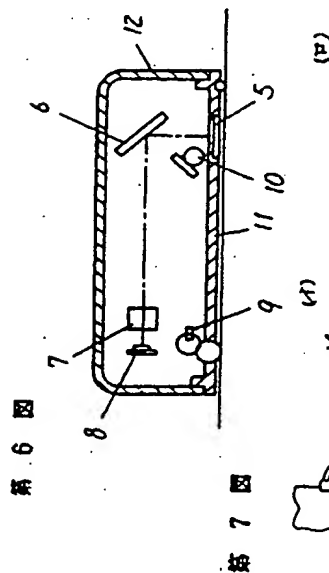

第 6 図

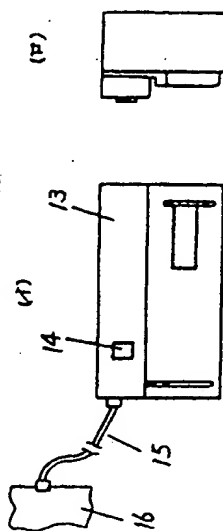

第 7 図



## MEANS FOR SOLVING THE PROBLEMS

To accomplish these objectives, the present invention comprises a reader proper having an image reader section, a drive section, and a scanning section, all integrated in one unit, and a paper feed section connected to the reader proper and driven by the drive section.

## OPERATION

With this construction, when the document consists of sheet of paper, the image reader can read images on sheets of document as a sheet-feeder type reader, and when the document is of a book form or a much larger size, the reader reads images as a self-propelled type. This makes the image reader quite usable, the need for only one connecting cable to the reader proper gives good operability to the reader.

## EMBODIMENT

In the following, an embodiment of the present invention will be described, referring to the accompanying drawings.

FIGS. 1 (a) and (b) are a front view and a side view of an image reader in the first embodiment of the present invention. FIG. 2 is a cross-sectional view taken along line B-B' in Fig. 1. FIG. 3 is a cross-sectional view taken along line C-C' in FIG. 1. FIG. 4 is a cross-sectional view taken along line D-D' in FIG. 1.

In FIG. 1, reference numeral 25 refers to a reader proper, 26 to a start switch, 27 to a paper feed section, 28 to a connecting cable, and 29 to a word processor proper, respectively.

In FIG. 2, numeral 30 refers to a cover glass, 31 to a mirror, 32 to a lens, 33 to a one-dimensional read sensor, 34 to a light source, 35 to a frame, and a 36 to a cover, respectively.

In FIG. 3, numeral 37 refers to a motor, 38 to a gear train on the side of the reader proper, 39 to a gear train on the side of the paper feed section, 40 to a paper feed roller; the motor 37 and the gear train 38 on the side of the reader proper constituting a

Fi - 8

**(54) IMAGE READER**

(11) 2-22958 (A)

(43) 25.1.1990 (19) JP


(21) Appl. No. 63-173307 (22) 12.7.1988

(71) MATSUSHITA ELECTRIC IND CO LTD (72) HIROSHI WAKAHARA(2)

(51) Int. Cl.<sup>3</sup>. H04N1/04, G06F15/64, G06K9/20, H04N1/12

**PURPOSE:** To improve facility and operability by enabling an image to be read in by setting a reader as a sheet feeder type reader possible to surely read in a sheet shape original, and as a self-traveling type reader when it is desired to read in a book type or a large flat original.

**CONSTITUTION:** The title reader is constituted of a main body 25, a start switch 26, a paper supply part 27, a connection cable 28, and a word processor main body 29. And the device functions as the sheet feeder type reader possible to surely read in the original in case of reading the sheet shape original, and functions as the self-traveling reader when it is desired to read in the book type or the large flat original, and also, it is enough to prepare only one connection cable 28 to the main body 25. In such a way, it is possible to make the device miniaturized and easy to use, and to improve the operability.

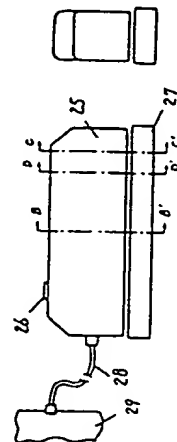**(54) FACSIMILE COMMUNICATION SYSTEM**

(11) 2-22959 (A)

(43) 25.1.1990 (19) JP


(21) Appl. No. 63-172993 (22) 12.7.1988

(71) NEC CORP (72) NAOKI KURAGAMI

(51) Int. Cl.<sup>3</sup>. H04N1/32, H04N1/21, H04N1/40

**PURPOSE:** To prevent memory capacity from being requested excessively by starting recording by a recording part at a time when data by the number of lines estimated to be re-sent due to a line error is accumulated in a reception memory part.

**CONSTITUTION:** The title system is equipped with a facsimile transmitter 1 equipped with a communication control part 2, a line 3, and a facsimile receiver 9 consisting of a reception communication control part 4, the reception memory part 5, a control part 6, and a storage part 8. And the control part 6 makes the recording part 8 start the recording at the time when the data by the number of lines estimated to be re-sent due to the line error is accumulated in the reception memory part 5. In such a way, it is not required to prepare the memory capacity for all the data as in a conventional system, and it can be set at a required minimum.

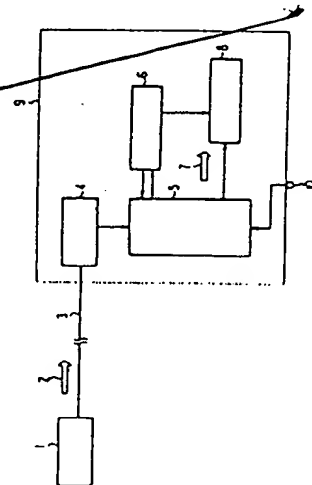**(54) IMAGE EXPRESSING METHOD**

(11) 2-22960 (A)

(43) 25.1.1990 (19) JP


(21) Appl. No. 63-173549 (22) 12.7.1988

(71) BROTHER IND LTD (72) MASAHIRO NISHIHARA

(51) Int. Cl.<sup>3</sup>. H04N1/40, G06F15/68

**PURPOSE:** To prevent a stripe pattern offensive to the eye from being generated by controlling the distribution of a binary image element by the set of a threshold value as increasing the number of gradation falsely by a mean error minimizing method.

**CONSTITUTION:** An image processing device is constituted of an image scanner 1 to read in an original image with multi-gradation, and an electronic controller 5 to process a video signal from the image scanner 1 and to output it to a printer 3. Here, a prescribed number of set of threshold values is conformed to every set of a prescribed number of image elements, and a parameter decided based on the density of each image element of the original image is compared with a corresponding threshold value in the set. The set of the threshold values is prepared in such a way that either one of them is set different in size, and a quantization error generated by binarization performed in such way is affected on the binarization of another image element by the mean error minimizing method. In such a way, it is possible to moderate correlation in the distribution of a binarized image element due to the accumulation of the quantization error, and to prevent the stripe pattern from being generated in the expression of an image.

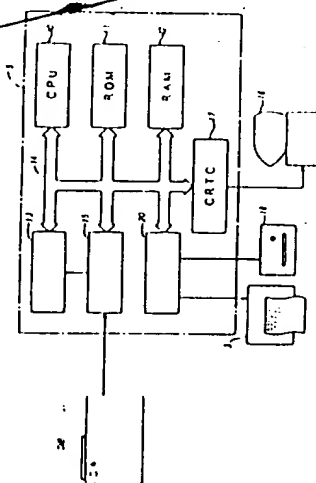

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**